



IR ZTA



Ceramic Resonator

Part Number	Frequency Range (MHz)	Frequency Accuracy	Stability in Temperature (-25°C ~ +85°C)	Aging for Ten Years	Load Capacitance	
					C1	C2
IRZTA MG	1,79 – 8,00	±0,5%	±0,3%	±0,3%	30 pF	
IRZTA MT	6,00 – 13,00	±0,5%	±0,3%	±0,3%	30 pF	
IRZTA MX	12,00 – 60,00	±0,5%	±0,3%	±0,3%	30 pF (13,01~20,0 MHz) 15pF (20,01~25,99MHz) 5pF (26,00~60,00MHz)	

Dimensions (Unit: mm)

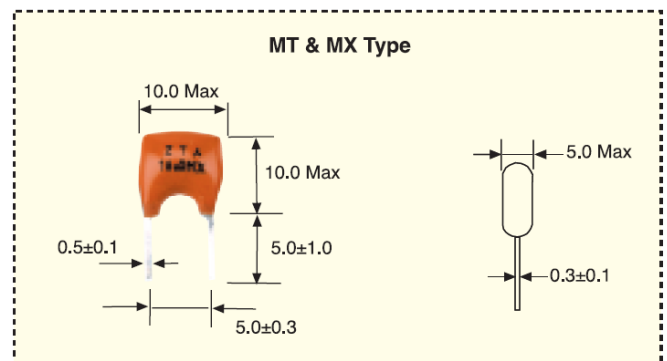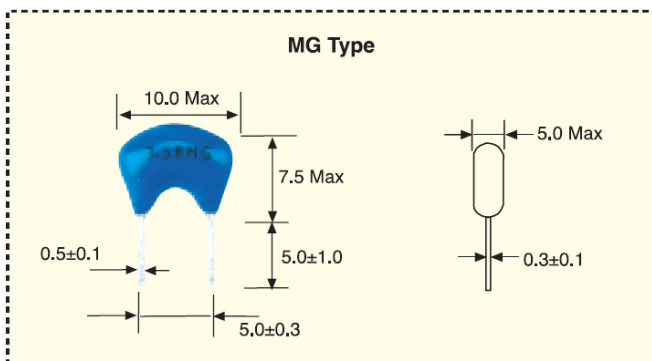

Test Circuit:

